

QUALITY ENABLES.

**Case study about drinking water production
in a South African mining area**

QUALITY WORKS.

LANXESS
Energizing Chemistry

Treatment of difficult water to drinking water quality – a secure and energy-efficient process

Application and system design

Acid mine drainage can appear in areas of coal or core mines. The conditioning of such water is challenging but necessary due to its ecological impact. In areas prone to water shortages it is beneficial to convert this water to potable water quality. In a South African mining area this is not only done successfully in terms of water quality, but also a very energy-efficient manner using ultra-low-pressure **Lewabrane® RO B400 ULP ASD** elements.


The reverse osmosis (RO) plant was developed and designed by Watercare Mining. Watercare Mining is one of the leading suppliers in the field of water treatment in southern Africa, with their core competencies in the planning, engineering, and realization of complex plants for the treatment of drinking water, process water, as well as wastewater.

At a glance

Application	Potable water
Location	South Africa
Product	Lewabrane® RO B400 ULP ASD
Number of elements	144
Production capacity	2,280 m ³ /day
Water type	Acid mine drainage after artificial groundwater recharge
Installation	August 2018

As a kind of natural pretreatment the water passes through the ground and is pumped to the surface for further treatment in the water treatment plant. The water treatment plant consists of a glass media filtration and 1 µm cartridge filters in front of the reverse osmosis process. Additionally, a scale inhibitor and non-oxidizing biocides are used to prevent inorganics and biological fouling of the membrane. The RO plant itself has two stages with twelve vessels in stage one and six in stage two. Each vessel contains eight B400 ULP ASD elements. The recovery rate of the RO process is 72%. The feedwater has an average conductivity of around 2,600 µS/cm. The cleaned water, with a conductivity of < 100 µS/cm, is used locally as potable water after some remineralization.

X Lewabrane®

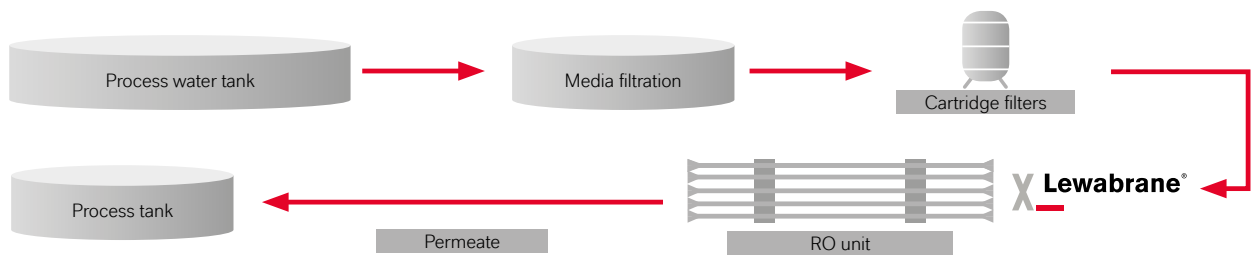


Membrane performance

As the feed water is complex, monthly cleaning is necessary under acidic and caustic conditions. During the observed period, the performance of the membrane could be restored after the cleaning. Using a standard brackish water membrane before, the water conductivity was the same magnitude but the pressure after startup was 30% higher. Therefore, significant energy savings could be achieved without losses in permeate quality. Additionally, the feed flow could be increased from 112 m³/h to 135 m³/h keeping the same recovery rate without any problems.

Conclusion

Lewabrane® RO B400 ULP ASD was specially developed for drinking water and wastewater treatment where a high rejection of organics and a good rejection of salts is required. The results confirm that this ultra-low-pressure membrane is suitable for treating difficult water to drinking water quality. Compared to a standard brackish water membrane, 30% lower pressure is needed, which leads to lower energy consumption. Even by increasing the plant capacity the desired water quality could be achieved.

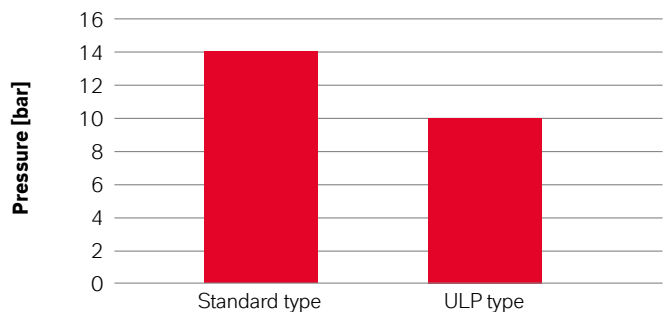

We are happy to support your business. Please contact us for additional information: visit www.lpt.lanxess.com



LANXESS Deutschland GmbH
Liquid Purification Technologies
Kennedyplatz 1
50569 Cologne, Germany

Phone: +49-221-8885-0
E-mail: lewabrane@lanxess.com

Health and Safety Information: Appropriate literature has been assembled which provides information concerning the health and safety precautions that must be observed when handling the LANXESS products mentioned in this publication. For materials mentioned which are not LANXESS products, appropriate industrial hygiene and other safety precautions recommended by their manufacturers should be followed. Before working with any of these products, you must read and become familiar with the available information on their hazards, proper use and handling. This cannot be overemphasized. Information is available in several forms, e.g., material safety data sheets, product information and product labels. Consult your LANXESS representative in Germany or contact the Regulatory Affairs and Product Safety Department of LANXESS Deutschland GmbH or – for business in the USA – the LANXESS Corporation Product Safety and Regulatory Affairs Department in Pittsburgh, PA, USA.

Regulatory Compliance Information: Some of the end uses of the products described in this publication must comply with applicable regulations, such as the FDA, BFR, NSF, USDA, and CPSC. If you have any questions on the regulatory status of these products, contact – for business in the USA – the LANXESS Corporation Regulatory Affairs and Product Safety Department in Pittsburgh, PA, USA or for business outside US the Regulatory Affairs and Product Safety Department of LANXESS Deutschland GmbH in Germany.

The manner in which you use and the purpose to which you put and utilize our products, technical assistance and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations are beyond our control. Therefore, it is imperative that you test our products, technical assistance and information to determine to your own satisfaction whether they are suitable for your intended uses and applications. This application-specific analysis must at least include testing to determine suitability from a technical as well as health, safety, and environmental standpoint. Such testing has not necessarily been done by us. Unless we otherwise agree in writing, all products are sold strictly pursuant to the terms of our standard conditions of sale. All information and technical assistance is given without warranty or guarantee and is subject to change without notice. It is expressly understood and agreed that you assume and hereby expressly release us from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance, and information.

Any statement or recommendation not contained herein is unauthorized and shall not bind us. Nothing herein shall be construed as a recommendation to use any product in conflict with patents covering any material or its use. No license is implied or in fact granted under the claims of any patent.

All trademarks are trademarks of the LANXESS Group, unless otherwise specified. Status 08/2019